


IX Series Registering a Network Camera

The IX Series network intercom system allows for an Onvif Profile S IP Camera to be added to the system for viewing on the IX-MV master station. A maximum of 50 Onvif Profile S IP cameras can be viewed from a single master station.

IX Series Block Diagram

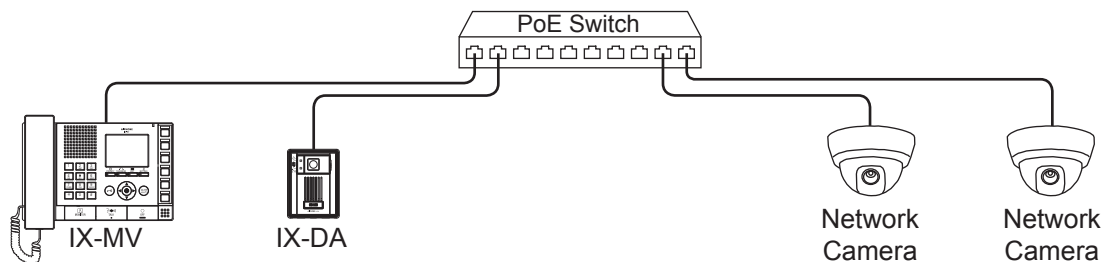

Overview

Each IX-MV master can have up to 50 Onvif Profile S cameras registered to it. The IX Support Tool allows you to register a maximum of 50 IP cameras to the system as a whole. If additional IP cameras need to be registered, the web browser interface of the IX-MV will need to be used. To view the cameras registered, select **NETWORK CAMERA SEARCH** from the main screen on the IX-MV and select the specific camera.

Registering Network Camera Procedure (IX Support Tool)

This procedure is for registering a network camera to an existing functioning IX Series intercom system. Launch the IX Support Tool application and select the system to be programmed.

Expand the System Information Tree.

Click **Address Book**

Click **Open Network Camera List**

Click **Open Network Camera Registry**

Click **Add Camera** (System will search the network for cameras)

The Network Camera Selection screen will appear and the Network Camera Search List will show the cameras that were found.

Click the radio button for **Select from Network Camera Search List**

Check the box beside each camera to be registered in the Search List

Enter the ID and Password for the camera (provided by camera manufacture)

Click **Get Network Information**

The camera(s) will populate in the Network Camera Information table.

Check the box beside each camera to be registered

Click **Register**

Name each camera (optional)

Click **Update** to save changes.

Click **Address Book** again

Click **Open Network Camera List**

Use the drop down under each available Network Camera to select for each master

Click **Update** to save changes.

Upload settings to stations.