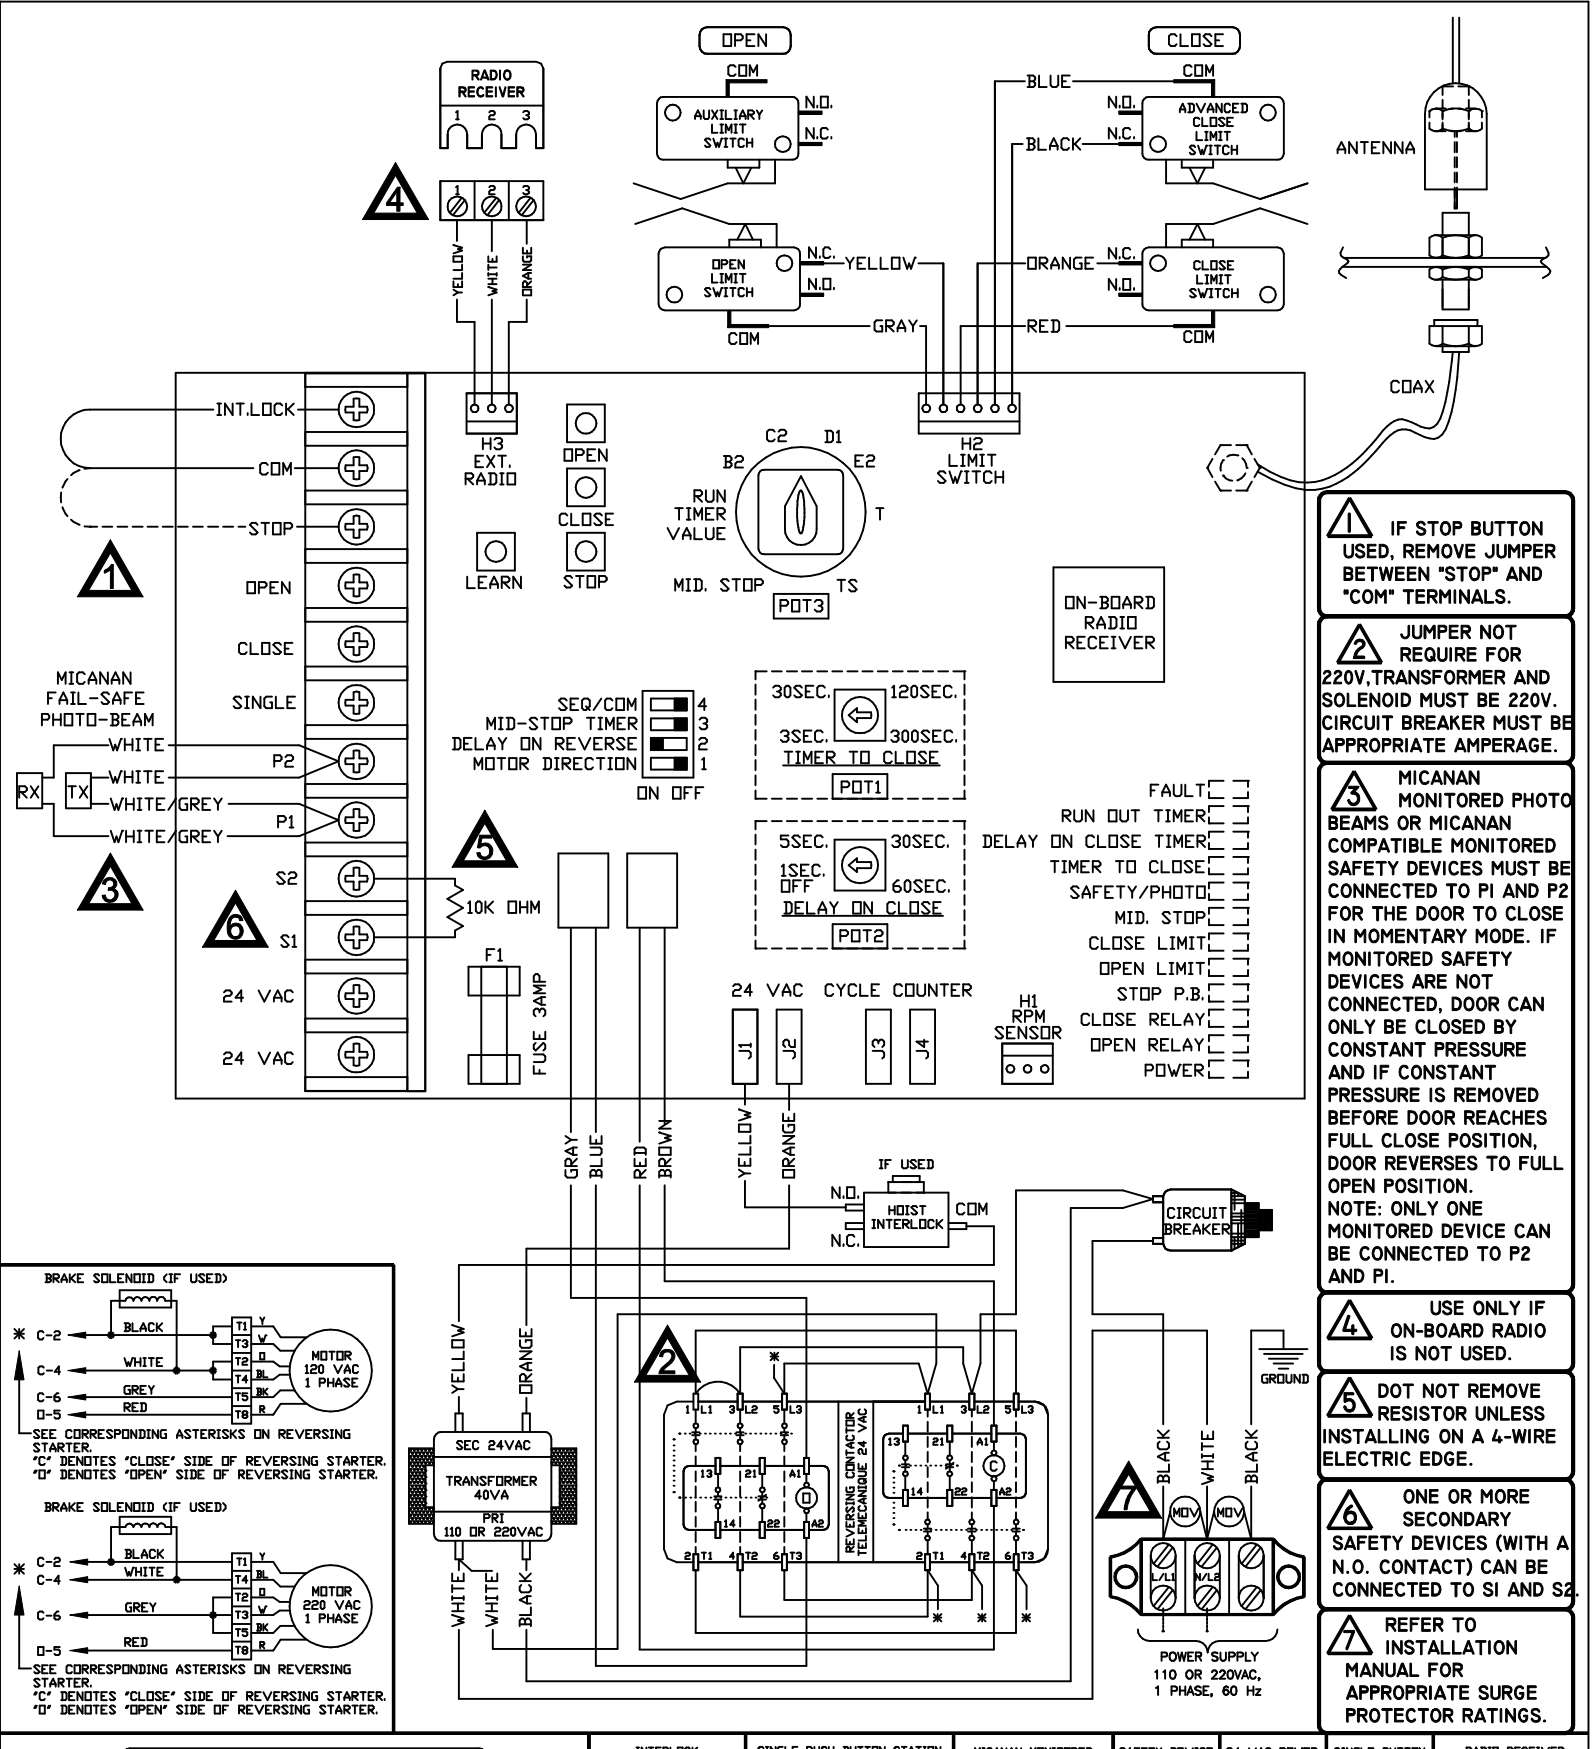


1. IF STOP BUTTON USED, REMOVE JUMPER BETWEEN "STOP" AND "COM" TERMINALS.
2. JUMPER NOT REQUIRE FOR 220V,TRANSFORMER AND SOLENOID MUST BE 220V. CIRCUIT BREAKER MUST BE APPROPRIATE AMPERAGE.
3. MICANAN MONITORED PHOTO BEAMS OR MICANAN COMPATIBLE MONITORED SAFETY DEVICES MUST BE CONNECTED TO PI AND P2 FOR THE DOOR TO CLOSE IN MOMENTARY MODE. IF MONITORED SAFETY DEVICES ARE NOT CONNECTED, DOOR CAN ONLY BE CLOSED BY CONSTANT PRESSURE AND IF CONSTANT PRESSURE IS REMOVED BEFORE DOOR REACHES FULL CLOSE POSITION, DOOR REVERSES TO FULL OPEN POSITION.
NOTE: ONLY ONE MONITORED DEVICE CAN BE CONNECTED TO P2 AND PI.
4. USE ONLY IF ON-BOARD RADIO IS NOT USED.
5. DOT NOT REMOVE RESISTOR UNLESS INSTALLING ON A 4-WIRE ELECTRIC EDGE.
6. ONE OR MORE SECONDARY SAFETY DEVICES (WITH A N.O. CONTACT) CAN BE CONNECTED TO SI AND S2.
7. REFER TO INSTALLATION MANUAL FOR APPROPRIATE SURGE PROTECTOR RATINGS.

I-PHASE 110/220VAC
MSLC100-WW
REV. D DATE:11.11.10
TECH. HELP LINE:
CANADA: 1-(877) 888-1116
USA: 1-(888) 816-8584

MICANAN
Commercial Door Opening Devices

INTERLOCK
LOCK COM
REMOVE FACTORY INSTALLED JUMPER IF EXTERNAL INTERLOCK DEVICE IS REQUIRED. PLACE A NORMALLY CLOSED SET OF WIRES ACROSS THESE TWO TERMINALS.

SINGLE PUSH-BUTTON STATION
COM STOP OPEN CLOSE
OPEN
CLOSE
STOP

MICANAN MONITORED PHOTO BEAM
P2 P1
WHITE
WHITE/GREY
WHITE/GREY
TX
RX

SAFETY DEVICE
S2 S1
SAFETY REVERSE DEVICE (N.O. CONTACT)

24 VAC POWER
24VAC 24VAC
24 VAC POWER AVILABLE 10 VA, MAX.

SINGLE BUTTON
COM SINGLE
SINGLE BUTTON (N.O. CONTACT)

RADIO RECEIVER
RADIO RECEIVER
1 2 3

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO MICANAN SYSTEMS INC. AND SHALL NOT BE REPRODUCED OR DISCLOSED OR USED FOR ANY DESIGN OR MANUFACTURE EXCEPT WHEN USER POSSESSES DIRECT WRITTEN AUTHORISATION FROM MICANAN SYSTEMS INC.