




Quick Install Guide

****Recommended wiring: 18/6 shielded for main device, and 18/4 shielded for optional wiegand devices**** ⚠


Items Included in Kit

- | | |
|---|-------------------------------|
| 1 Watchman EVO Unit | 6 Bolts X 4 |
| 2 12 Volt DC Power Supply | 7 Quick Install Guide |
| 3 Magnetic Read Switch ⚠ | 8 Activation & Test Process |
| 4 Keys <i>(Note: Leave one key with the customer)</i> | 9 Customer Information Packet |
| 5 Nuts X 4 | |


Watchman EVO Unit

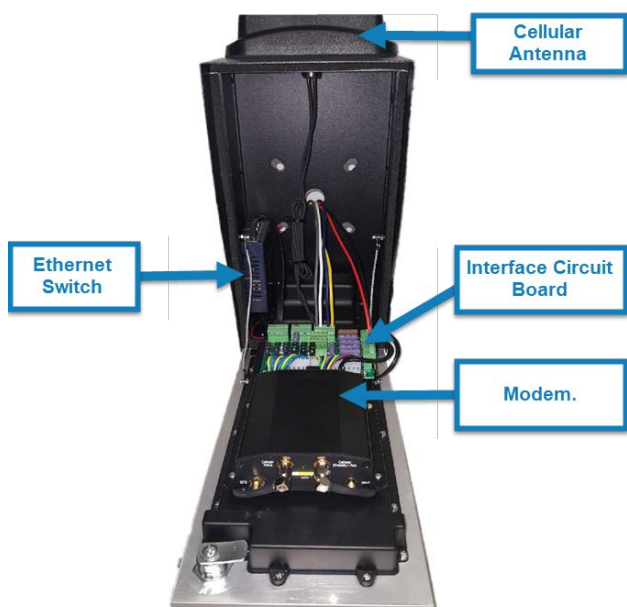

Power Supply Wiring

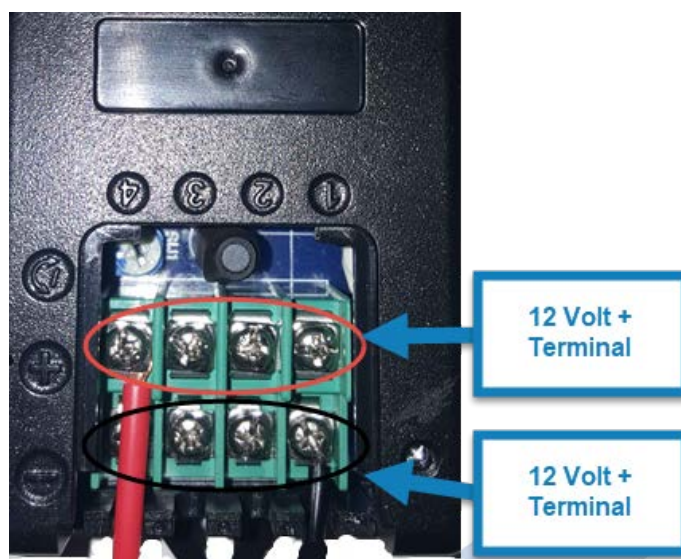


Interface Circuit Board (Oriented the same as the Watchman install)

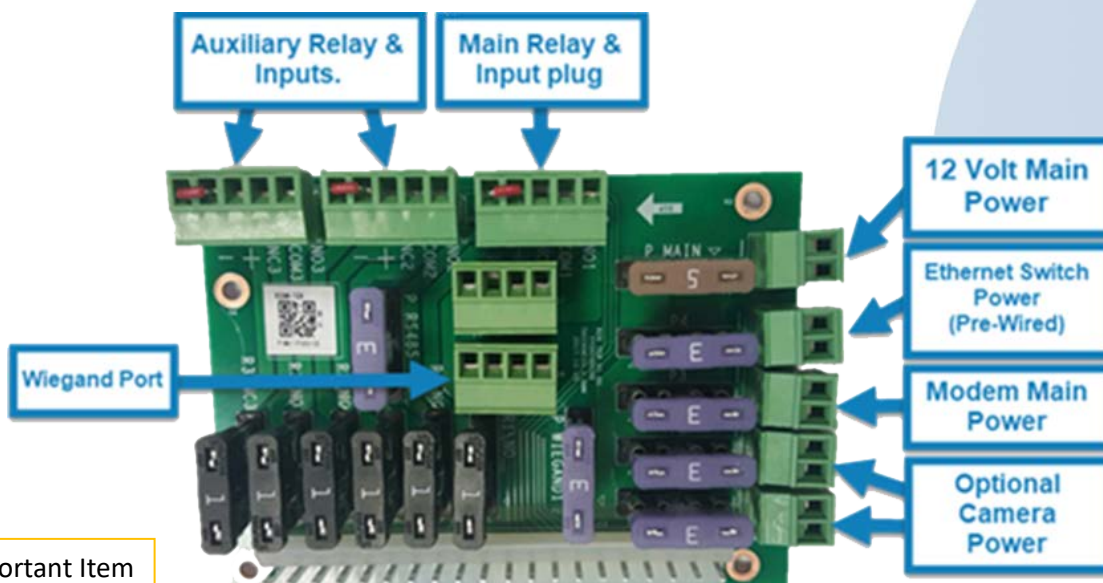

⚠ Important Item

Interface Wiring Diagram (Oriented the same as the Watchman install)

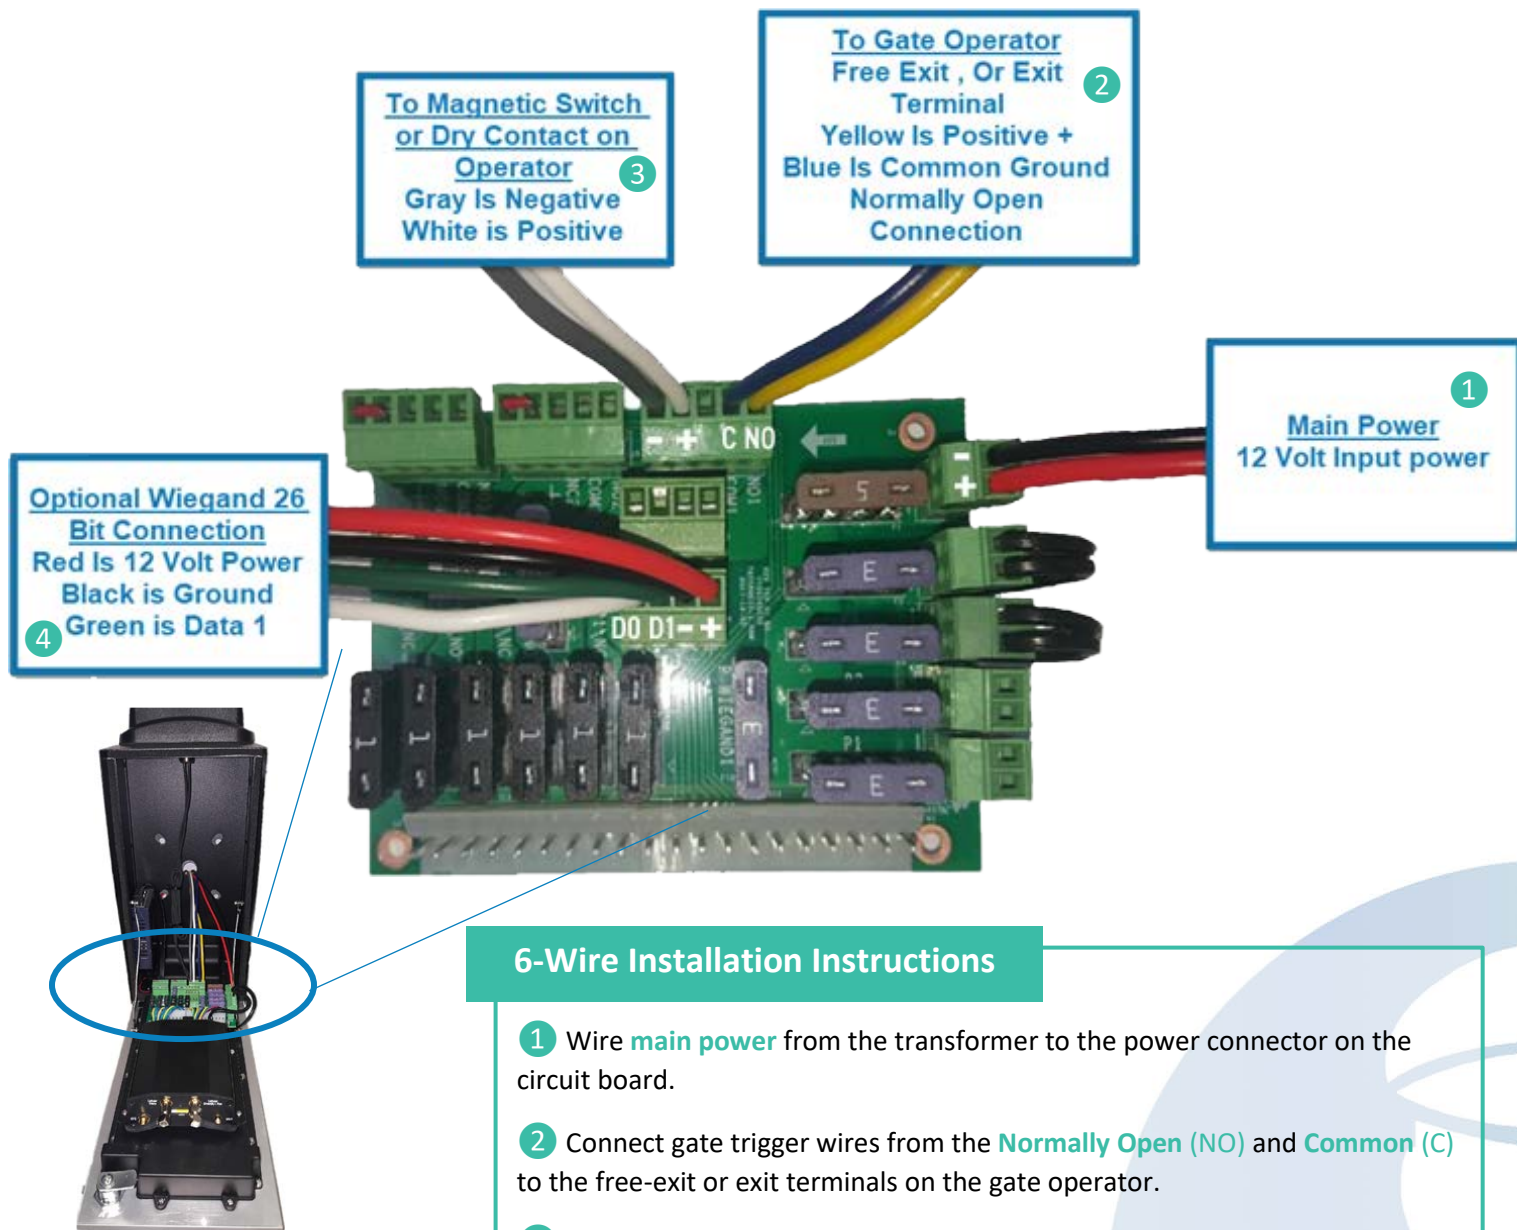

6-Wire Installation Instructions

- 1** Wire **main power** from the transformer to the power connector on the circuit board.
- 2** Connect gate trigger wires from the **Normally Open (NO)** and **Common (C)** to the free-exit or exit terminals on the gate operator.
- 3** Connect the gate status wires on the 6 pin connector on the main relay and input plug to the magnetic switch or a **Dry Contact**, Normally Closed (NC) relay on the gate operator.
- 4** If using an optional 26-bit reader (ex., keypad, card reader, RFID, or clicker), wire the device to the **Wiegand connection** on the interface circuit board.
- 5** Use **Camera Guide** if adding optional external camera.
- 6** Test/activate using the test credentials on the **Activation & Test Process** document. ⚠

⚠ Important Item