



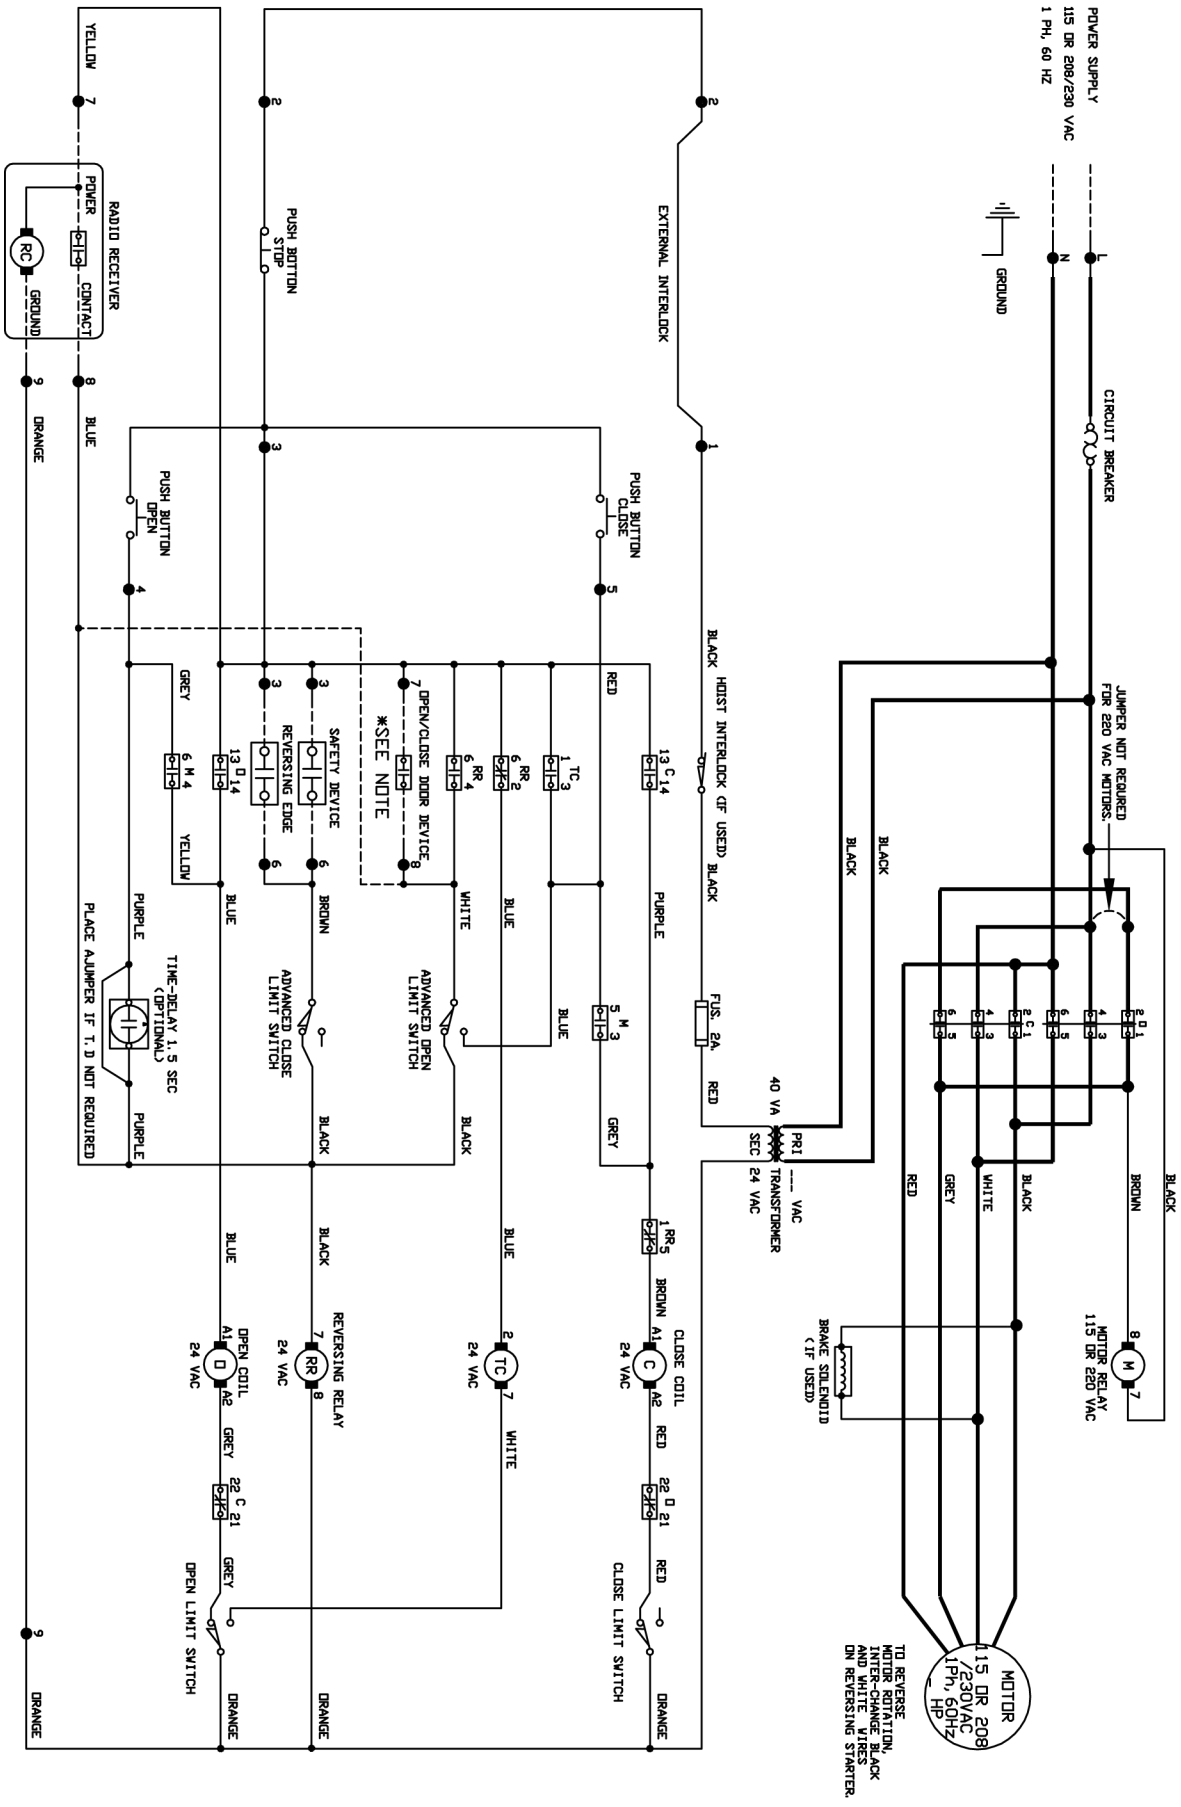

- CIRCUIT DESCRIPTION:
1. 24VAC CONTROL CIRCUIT.
 2. OPEN/CLOSE/STOP COMMANDS.
 3. SAFETY REVERSE.
 4. PRE-WIRE FOR RADIO-CONTROLS, LOOP DETECTORS, PHOTOCELLS ETC.



 MICANAN Command Door Opening Devices		TECH. HELP LINE: CANADA: 1-(877) 888-1116 USA: 1-(888) 816-8584			
TITLE	1-PHASE WIRING SCHEMATIC				
DWG. NO.	MS1007C-S				
VERIFIED BY	C.S.				
CLIENT					
PROJECT					
MANUFACTURER	MTCANAN SYSTEMS INC.				

TIMER TO CLOSE FUNCTION:
AUTOMATIC TIMER TO CLOSE IS ACTIVATED WHEN DOOR IS FULLY OPEN. TIMER IS RESET BY OPEN-DOOR DEVICE AND SAFETY DEVICE.
*THIS OPERATOR LEAVES THE FACTORY WITH RADIO CONTROL TO OPEN ONLY AND REFRESH TIMER. IF RADIO CONTROL IS REQUIRED TO OPEN AND CLOSE, REMOVE BLUE WIRE FROM T84 (OR FROM TIME-DELAY (IF USED)) AND PLACE ON T86.
NOTE: FOR SAFETY REASONS, MTCANAN DOES NOT RECOMMEND THAT THE RADIO CONTROL CLOSE THE DOOR WHEN A TIMER IS USED.

TIMER TO OPEN REVERSE:
IF 1.5 SEC. TIME DELAY UPON REVERSE IS REQUIRED, REMOVE THE PURPLE AND BLUE WIRES FROM TERMINAL #4 AND CONNECT TO ONE END OF TIME-DELAY AND CONNECT THE OTHER END, BACK TO TERMINAL #4.

REMOVE FACTORY INSTALLED JUMPER IF EXTERNAL INTERLOCK IS REQUIRED. PLACE A NORMALLY CLOSED SET OF WIRES ACROSS THESE TWO TERMINALS.

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO MTCANAN SYSTEMS INC. AND SHALL NOT BE REPRODUCED OR DISCLOSED OR USED FOR ANY DESIGN OR MANUFACTURE EXCEPT WHEN USER POSSESSES DIRECT WRITTEN AUTHORIZATION FROM MTCANAN SYSTEMS INC.

DATE	REV
14.04.09	F