

With related accessories

Choose from the following items to build out your project with all of the accessories needed.

1

Gate Hardware:



Cantilever Wheels



Cantilever Wheels and Covers

2

Gate Operator:



HySecurity SlideSmart DC 15
115/208/230 Input voltage
24 VDC Battery run voltage
1500 lbs max gate weight
Continuous duty
Includes 30 ft of nickel plated chain



HySecurity SlideSmart DC HD 25/30
115/208/230 Input voltage
24 VDC Battery run voltage
HD25 = 2500 lbs max gate weight
HD30 = 3000 lbs max gate weight
Continuous duty
Post mount or pad mount
Includes 30 ft of nickel plated chain



Not for use with HD Models
Base Extension (MX002094)
Extended Battery Kit. Includes
base ext and 2-50 Ah batteries
(MX002141)

3

UL-325 Gate Safety:



Photo-Eye Included
(IRB-MON)




Optional:
Photo-Eye
(Omron E3K)



Photo-Eye Reflector
(SD-TRB)

ASO Gate Edge (Resistive):
Included: EDGECHL-HP-5ft (Channel mount)
Optional: EDGESQR-5ft (Sq tube mount)
EDGERND-5ft (Rnd pipe mount)

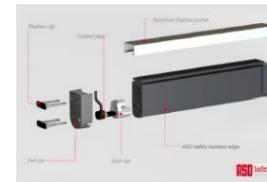

4

Access Controls & Accessories:



Doorking keypad
PN: 1515-080



Antenna kit
(106603)



Radio receiver
PN: 850LM



Transmitter
811LM

3b

Fire Access:



Knox Key switch
housing
PN: 1401-080



Knox Key switch model
3502
Purchase directly from
fire department.

Other Accessories are available, call
or visit our website at
www.gatesandcontrols.com

5

Vehicle Detection loops:



Pre-formed loops
are available in
several different
sizes.

Size	Direct Burial	Saw Cut
4x8	RL24-40	SC24-50
4x8	RL24-60	SC24-100
6x12	RL36-40	SC36-50
6x12	RL36-60	SC36-100
6x20	RL52-40	SC52-50
6x20	RL52-60	SC52-100



Loop Sealant
PN: BDLG-B



HY5B




Cartel Probe




Loop wire
PN: XLPE-1825-RED



HySecurity SlideSmart Residential/Commercial Slide gate system layout With related accessories

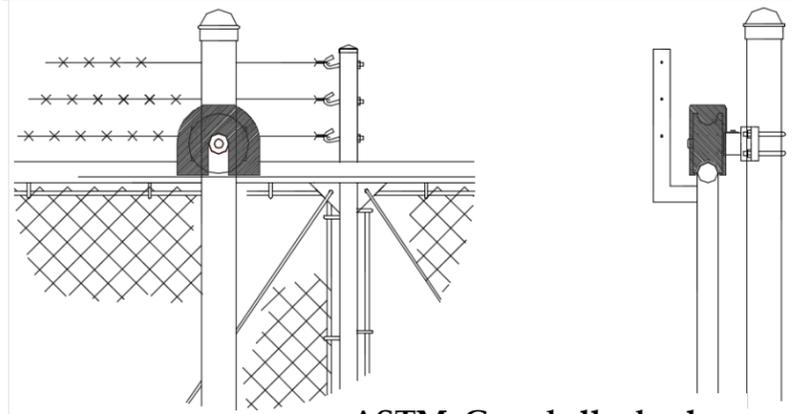


ASTM: Guard all wheels

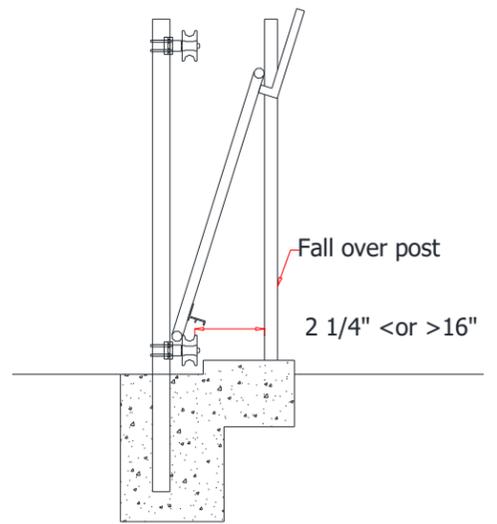


ASTM: Max picket spacing is 2.25"

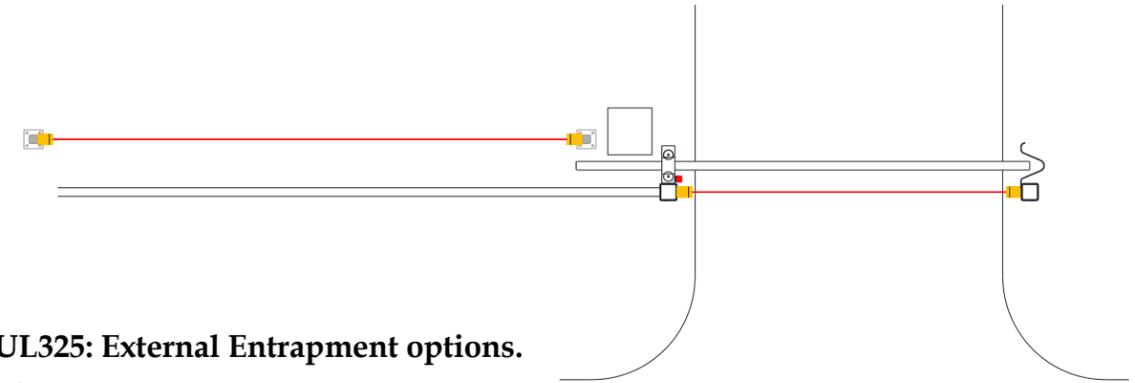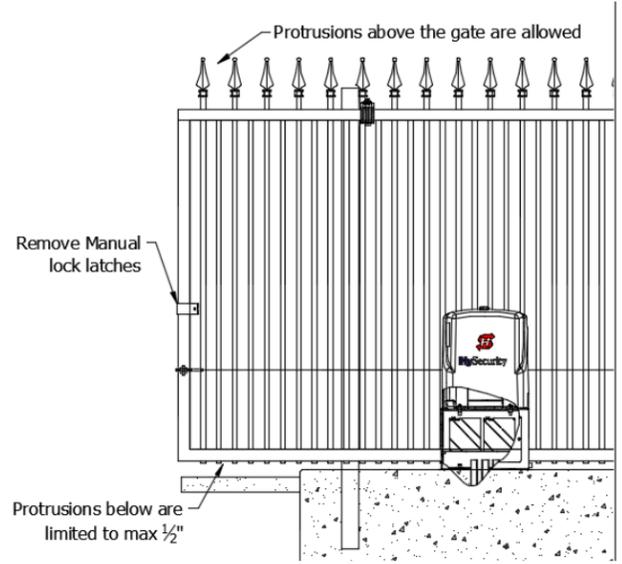

UL325: External Entrapment options. Photo-Eye

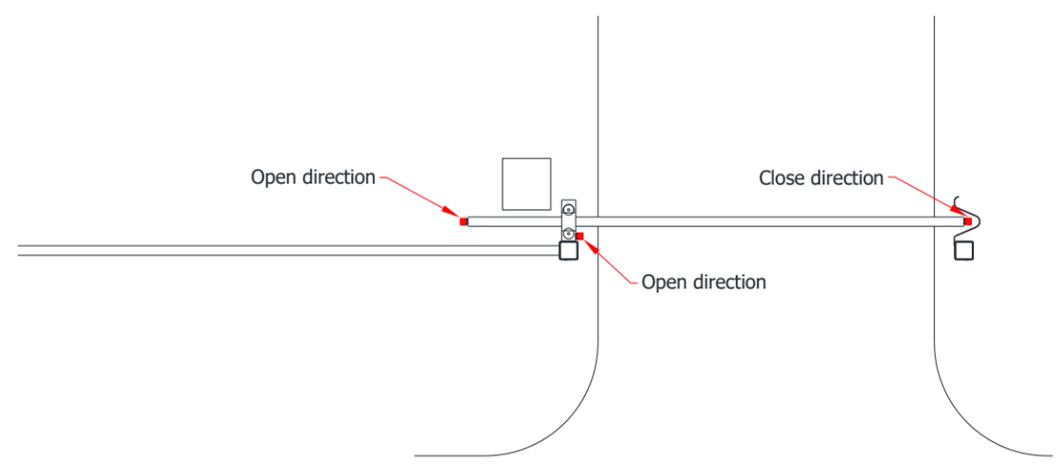

UL325: External Entrapment options. Gate edges

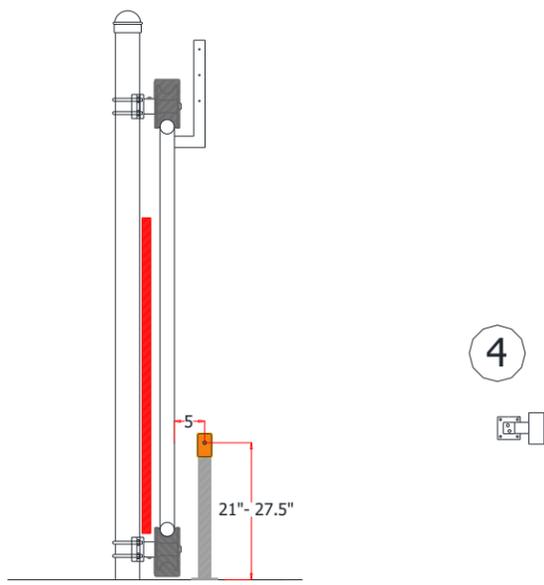

ASTM: Photo-eye 5" away and 21-27" high

