


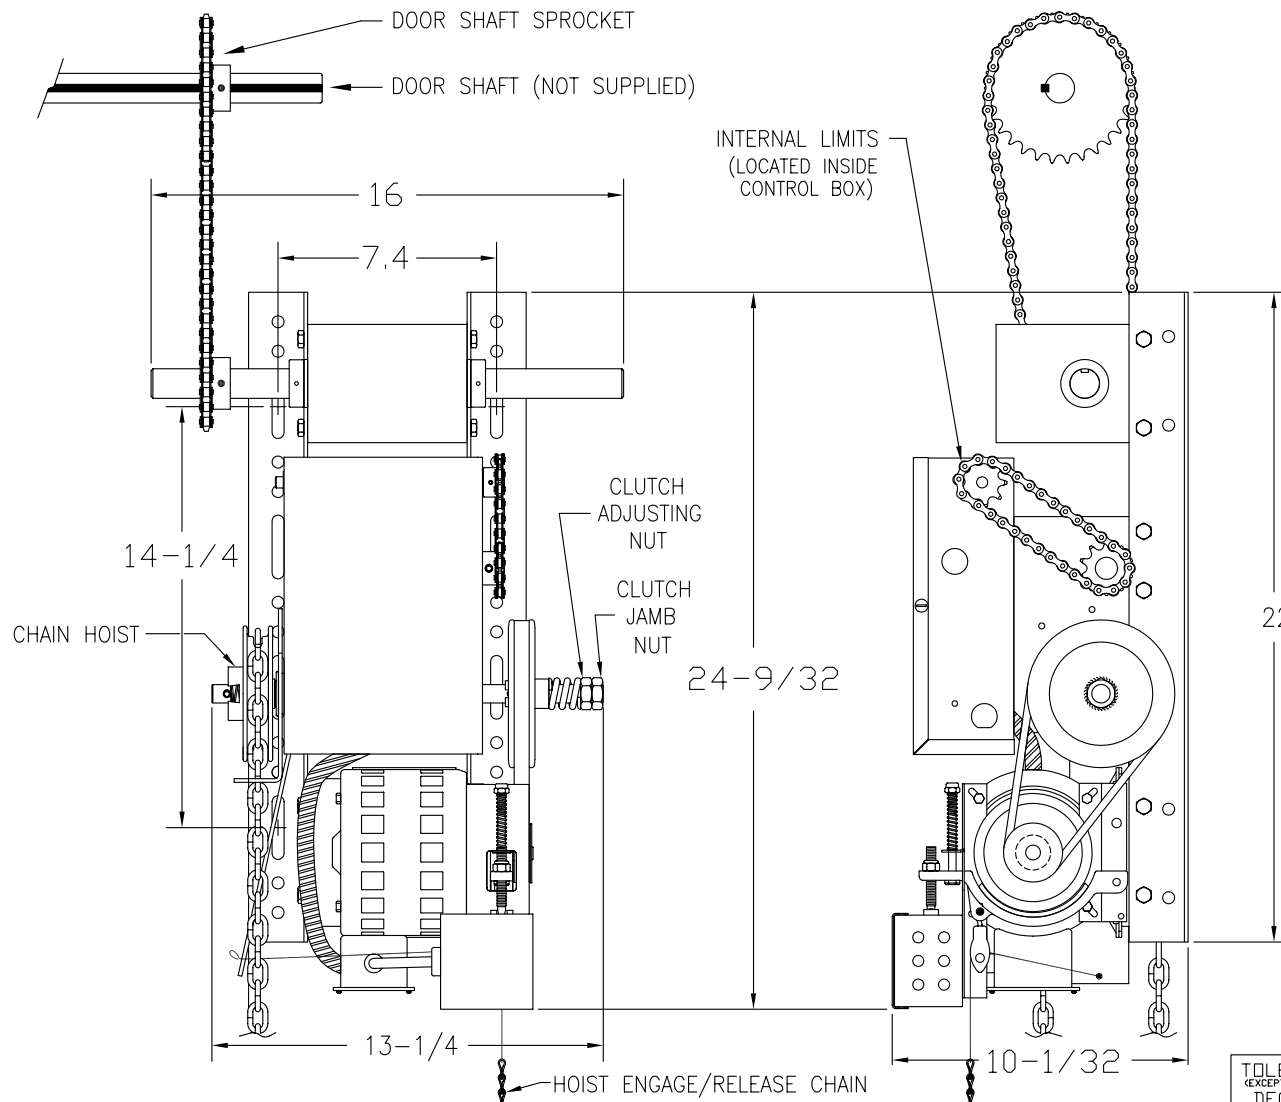

SPECIFICATIONS

MODEL : MH5011 HP: 1/2
VOLTS : 120 PHASE : SINGLE

- * UL AND CANADIAN UL LISTED
- * RIDIG BASE PSC, 1/2 HORSEPOWER MOTOR
- * MOTOR OVERLOAD PROTECTION
- * HIGH AMP, INDUCTIVE LOAD RATED RELAYS
- * ELECTRO-MECHANICAL MODELS
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT
- * SOLID STATE CONTROL MODELS (SUFFIX "S")
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT WITH ADVANCED SWITCH SELECTABLE FEATURES
- * SOLENOID BRAKE
- * THREE BUTTON CONTROL: OPEN, CLOSE, STOP
- * WIRED TO ACCEPT REVERSING EDGE INPUT
- * HEAVY GAUGE, POWDER-COATED STEEL FRAME RAILS AND CONTROL BOX
- * ALL SPROCKETS AND PULLEYS PINNED OR KEYED, SOLID STEEL DRIVE SHAFTS
- * FULLY ADJUSTABLE FRICTION CLUTCH
- * HEAVY DUTY PILLOW BLOCK BEARINGS ON OUTPUT SHAFT
- * INTEGRAL MANUAL CHAIN HOIST WITH FLOOR LEVEL ENGAGEMENT AND DISCONNECT.
- * FULLY ADJUSTABLE, INTERNAL, SHAFT DRIVEN LIMITS

TOLERANCE
 (EXCEPT AS NOTED)
 DECIMAL
 X.X ±0.030
 X.XX ±0.020
 X.XXX ±0.010

Allstar

c.p. ALLSTAR CORPORATION
 PO Box 240
 Downingtown, PA 19335

FRACTIONAL ±1/32	APPROVED BY	SCALE N/A	DRAWN BY CP COGGINS
ANGULAR ±1°	MATERIAL N/A	SHT 1 OF 1 © 1997	DATE 3/26/91
TITLE DWG, DIMENSIONS/SPECIFICATIONS, MODEL MH5011	DWG NO. 101384	REV C	