


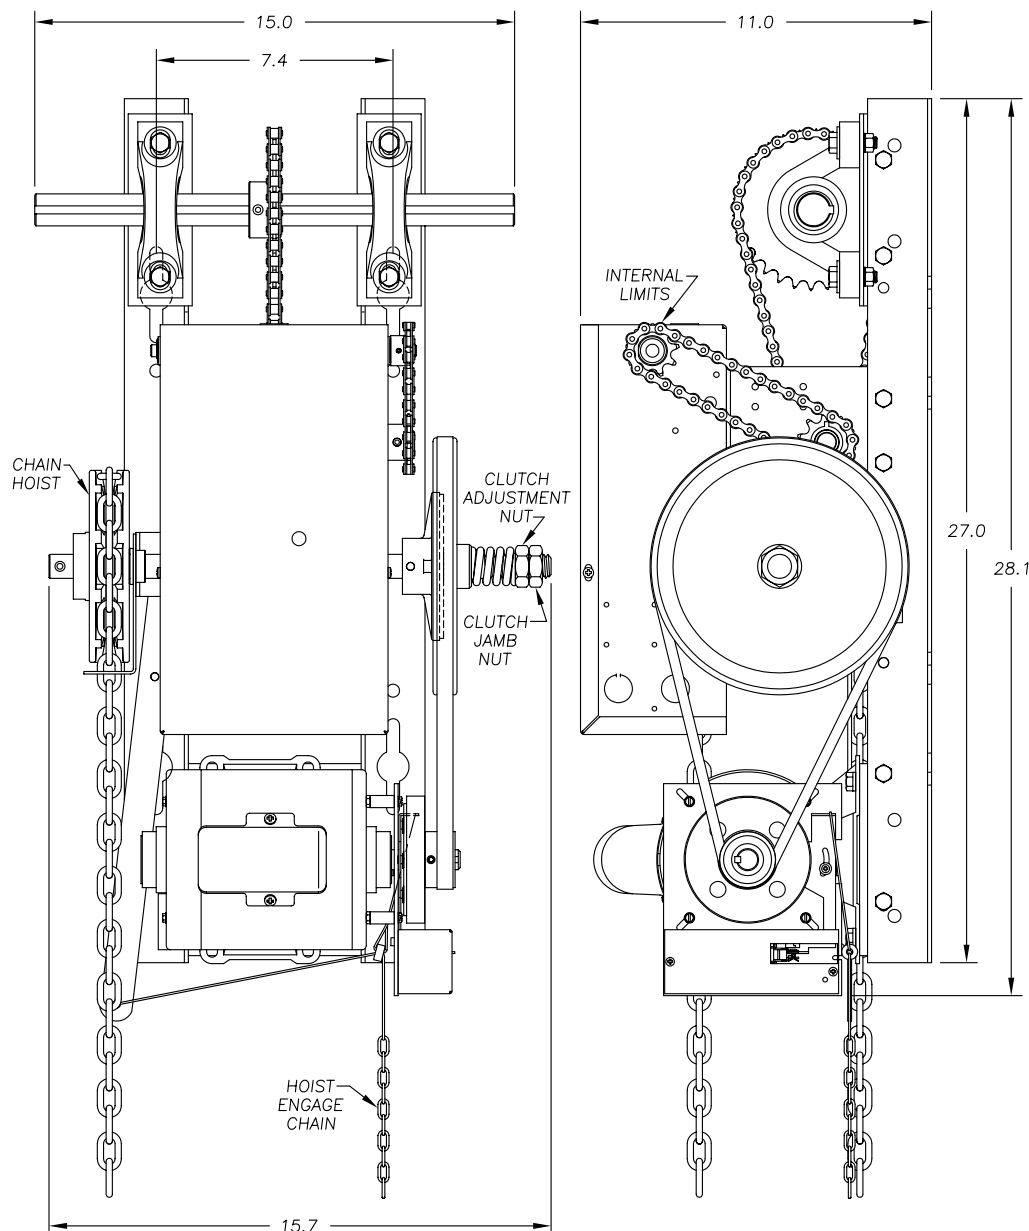

SPECIFICATIONS

MODEL : AUH HP: _____

VOLTS : _____ PHASE : _____

- * UL AND CANADIAN UL LISTED
- * HIGH STARTING TORQUE, CONTINUOUS DUTY MOTOR
- * MOTOR OVERLOAD PROTECTION
- * ELECTRO-MECHANICAL MODELS
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT
 - * IEC REVERSING CONTACTOR RATED 1-1/2 HP
- * SOLID STATE CONTROL MODELS (SUFFIX "S")
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT WITH ADVANCED SWITCH SELECTABLE FEATURES
 - * HIGH AMP, INDUCTIVE LOAD RATED RELAYS
- * SOLENOID BRAKE
- * THREE BUTTON CONTROL: OPEN, CLOSE, STOP
- * WIRED TO ACCEPT REVERSING EDGE INPUT
- * HEAVY GAUGE, POWDER-COATED STEEL FRAME RAILS AND CONTROL BOX
- * ALL SPROCKETS AND PULLEYS PINNED OR KEYED, SOLID STEEL DRIVE SHAFTS
- * FULLY ADJUSTABLE FRICTION CLUTCH
- * HEAVY DUTY PILLOW BLOCK BEARINGS ON OUTPUT SHAFT
- * INTEGRAL MANUAL CHAIN HOIST WITH FLOOR LEVEL ENGAGEMENT AND DISCONNECT.
- * FULLY ADJUSTABLE, INTERNAL, SHAFT DRIVEN LIMITS

TOLERANCE
(EXCEPT AS NOTED)
DECIMAL
X.X ±0.030
X.XX ±0.020
X.XXX ±0.010

Allstar

c.p. ALLSTAR CORPORATION
PO Box 240
Downingtown, PA 19335

FRACTIONAL
±1/32

APPROVED BY

SCALE
1:6

DRAWN BY **RDT**

DATE **9/10/96**

ANGULAR
±1°

MATERIAL

SHT **1** OF **1**
© 1997

TITLE
DWG, DIMENSIONS/SPECIFICATIONS, MODEL AUH

DWG NO. **107173**

REV
C