


APPROVED VENDOR	VENDOR PART NO.	DATE	REV	REVISION NOTES	ECN	BY
		08-04-99	A	RELEASED TO DOCUMENT CONTROL		CPC
		10-4-06	B	ADDED SOLID STATE CONTROLS SPECS		CPC

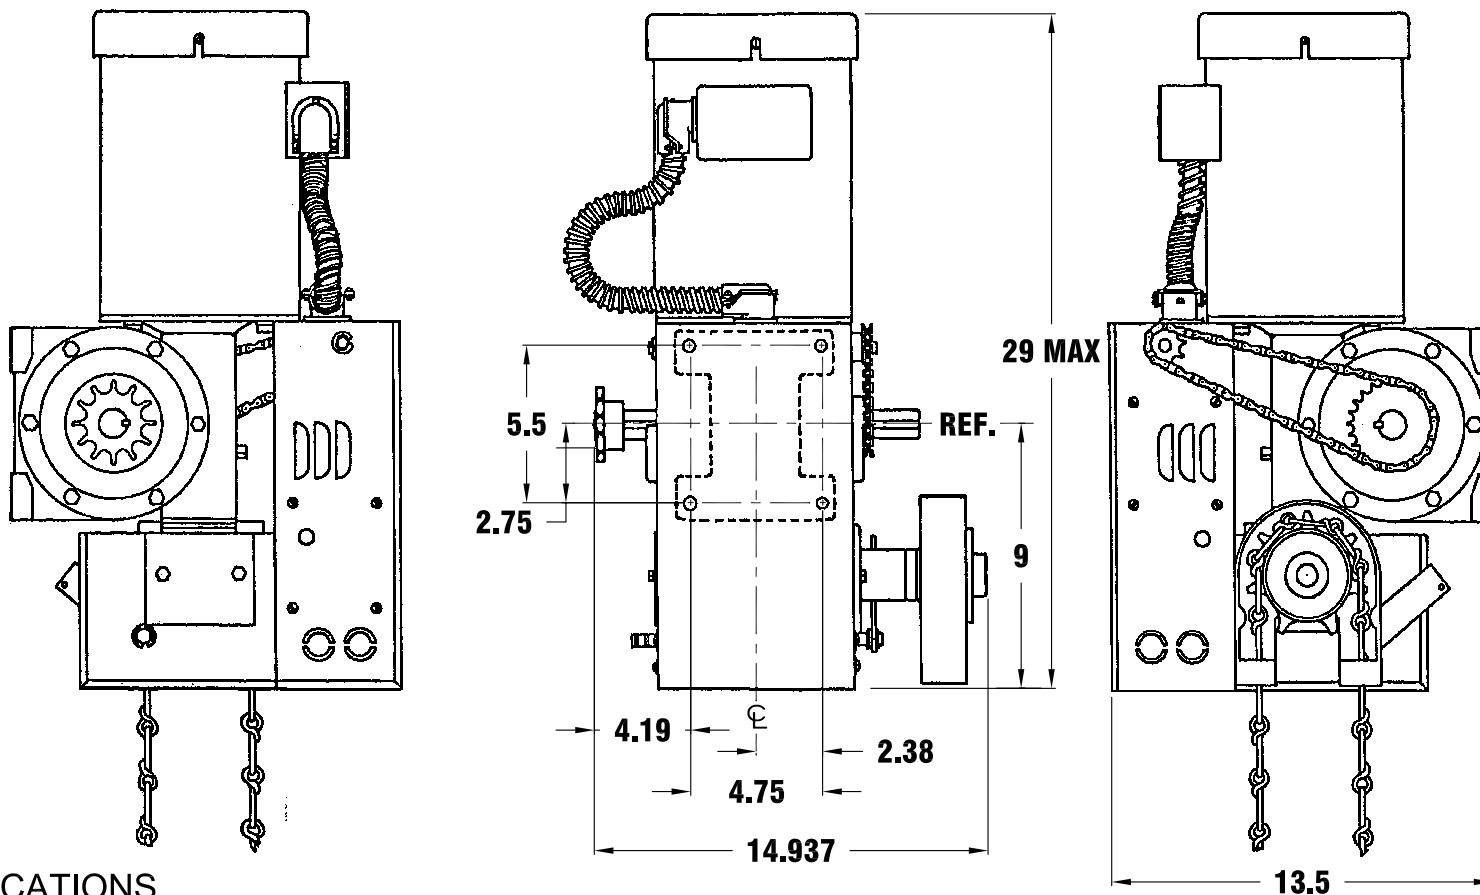

SPECIFICATIONS

MODEL : MO HP: _____

- * UL AND CANADIAN UL LISTED
- * HIGH STARTING TORQUE, CONTINUOUS DUTY MOTOR
- * MOTOR OVERLOAD PROTECTION
- * ELECTRO-MECHANICAL MODELS
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT
 - * IEC REVERSING CONTACTOR RATED 1-1/2 HP
- * SOLID STATE CONTROL MODELS (SUFFIX "S")
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT WITH ADVANCED SWITCH SELECTABLE FEATURES
 - * HIGH AMP, INDUCTIVE LOAD RATED RELAYS

VOLTS : _____ PHASE : _____

- * SOLENOID BRAKE (OPTIONAL ON 1/3 & 1/2 HP)
- * THREE BUTTON CONTROL: OPEN, CLOSE, STOP
- * WIRED TO ACCEPT REVERSING EDGE INPUT
- * HEAVY GAUGE, POWDER-COATED STEEL CONTROL BOX
- * GEAR IN OIL BATH PRIMARY REDUCTION
- * #50 CHAIN FINAL DRIVE STANDARD
- * KEYED SPROCKETS ON FINAL DRIVE
- * INTEGRAL MANUAL CHAIN HOIST WITH FLOOR LEVEL ENGAGING AND DISENGAGING
- * FULLY ADJUSTABLE, INTERNAL, SHAFT DRIVEN LIMITS

TOLERANCE
(EXCEPT AS NOTED)
DECIMAL
X.X ± 0.030
X.XX ± 0.020
X.XXX ± 0.010

Allstar

c.p. ALLSTAR CORPORATION
PO Box 240
Downingtown, PA 19335

FRACTIONAL $\pm 1/32$	APPROVED BY	SCALE NONE	DRAWN BY CPC
ANGULAR $\pm 1^\circ$	MATERIAL	SHT 1 OF 1	DATE 08-04-99
TITLE DWG, DIMENSIONS/SPECIFICATIONS, MODEL MO		DWG NO. 107709	REV —