


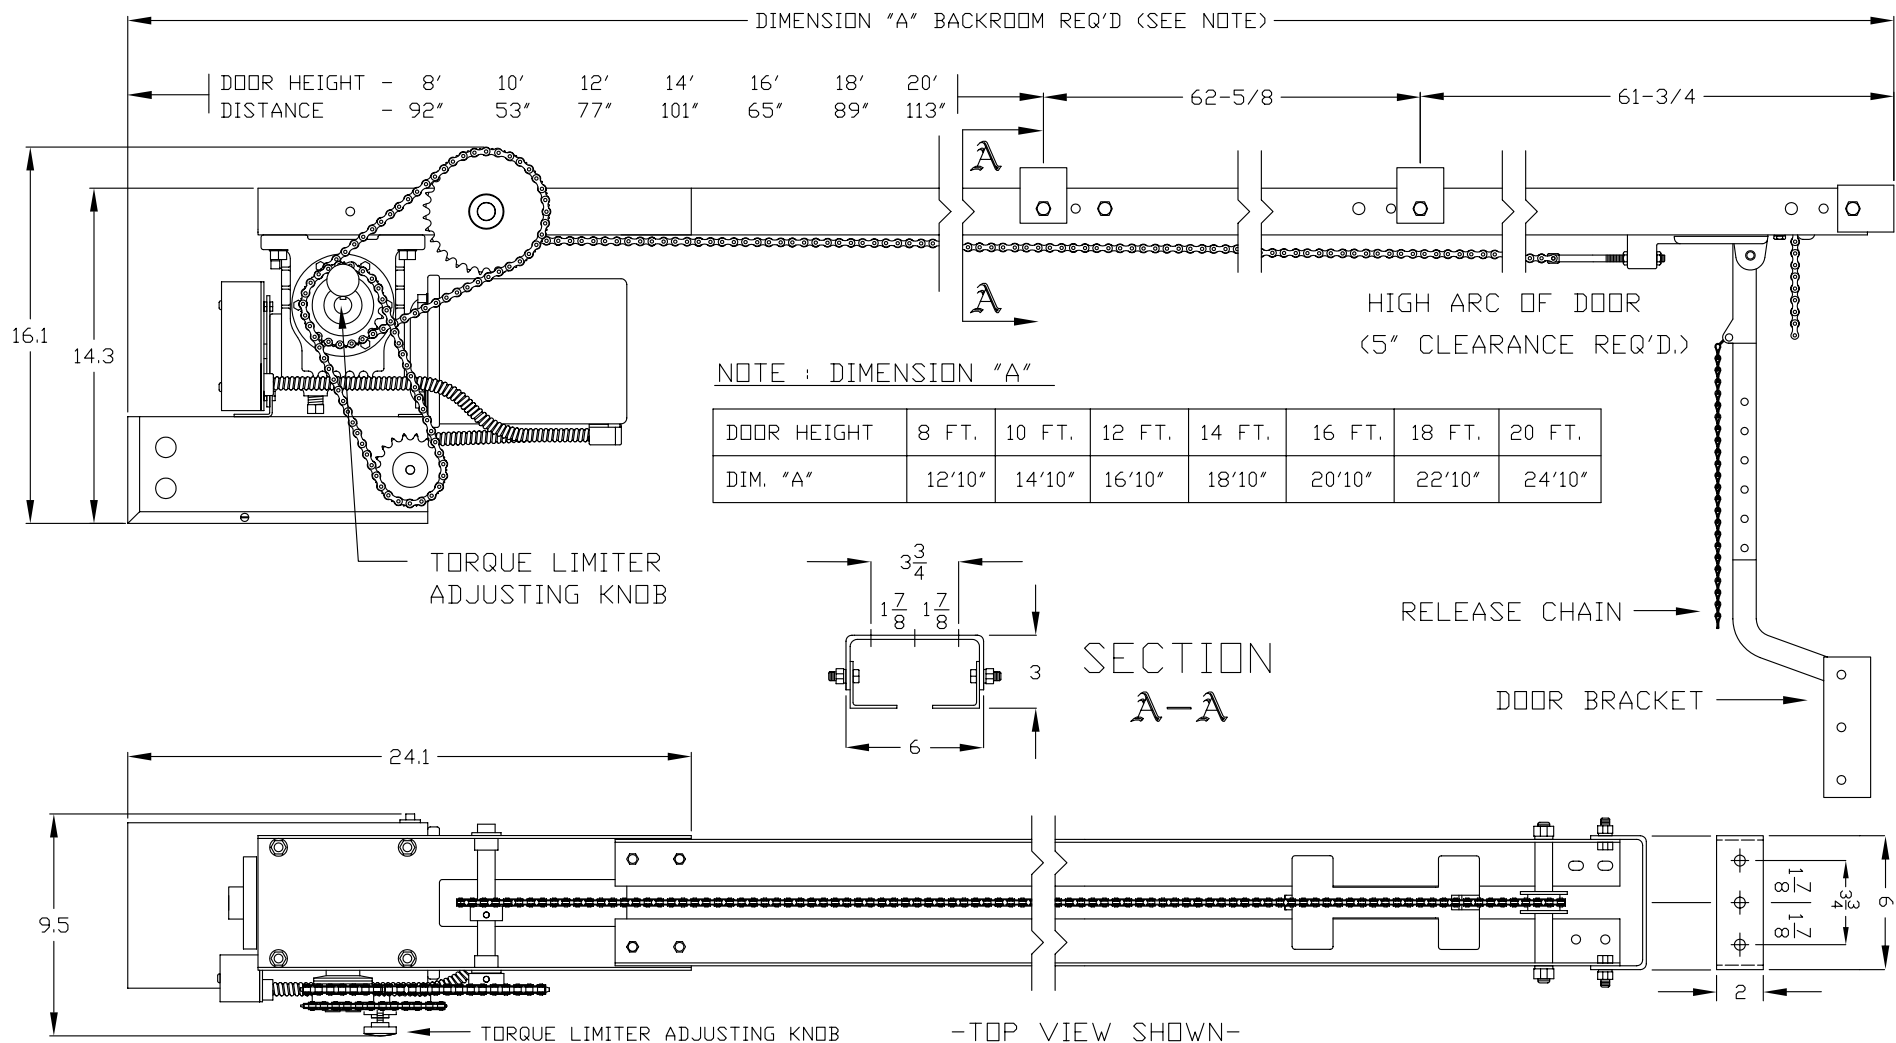

SPECIFICATIONS

MODEL : GT HP: _____

- * UL AND CANADIAN UL LISTED
- * HIGH STARTING TORQUE, CONTINUOUS DUTY MOTOR
- * MOTOR OVERLOAD PROTECTION
- * ELECTRO-MECHANICAL MODELS
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT
- * IEC REVERSING CONTACTOR RATED 1-1/2 HP
- * SOLID STATE CONTROL MODELS (SUFFIX "S")
 - * CLASS 2 (24 VOLT) CONTROL CIRCUIT WITH ADVANCED SWITCH SELECTABLE FEATURES
- * HIGH AMP, INDUCTIVE LOAD RATED RELAYS

VOLTS : _____ PHASE : _____

- * SOLENOID BRAKE (OPTIONAL ON 1/3 & 1/2 HP)
- * THREE BUTTON CONTROL: OPEN, CLOSE, STOP
- * WIRED TO ACCEPT REVERSING EDGE INPUT
- * HEAVY GAUGE, POWDER-COATED STEEL FRAME RAILS AND CONTROL BOX
- * 10:1 GEAR IN OIL BATH PRIMARY REDUCTION, FULL ROLLER CHAIN SECONDARY REDUCTION
- * ADJUSTABLE TORQUE LIMITER CLUTCH
- * MANUAL DOOR DISCONNECT
- * FULLY ADJUSTABLE, INTERNAL, SHAFT DRIVEN LIMITS

TOLERANCE (EXCEPT AS NOTED) DECIMAL X.X ±0.030 X.XX ±0.020 X.XXX ±0.010	 c.p. ALLSTAR CORPORATION PO Box 240 Downtown, PA 19335	
FRACTIONAL ±1/32	APPROVED BY	SCALE NONE
ANGULAR ±1°	MATERIAL	DRAWN BY CPC DATE 7-1-97
TITLE DWG, DIMENSIONS/SPECIFICATIONS, MODEL GT		SHT 1 OF 1 © 1997
DWG NO. 107849		REV B