

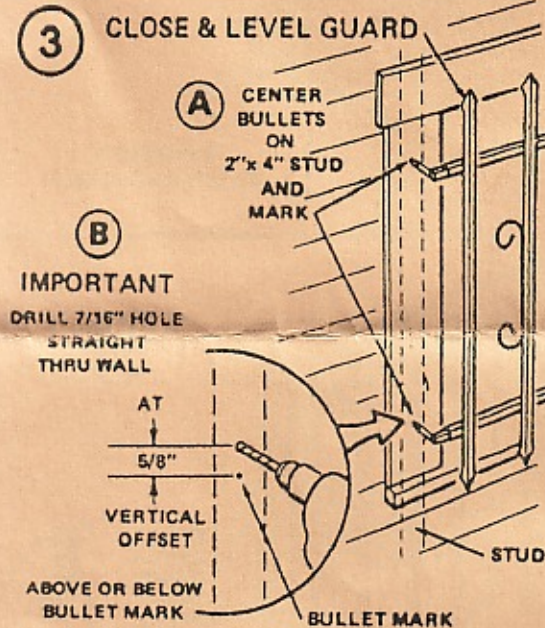
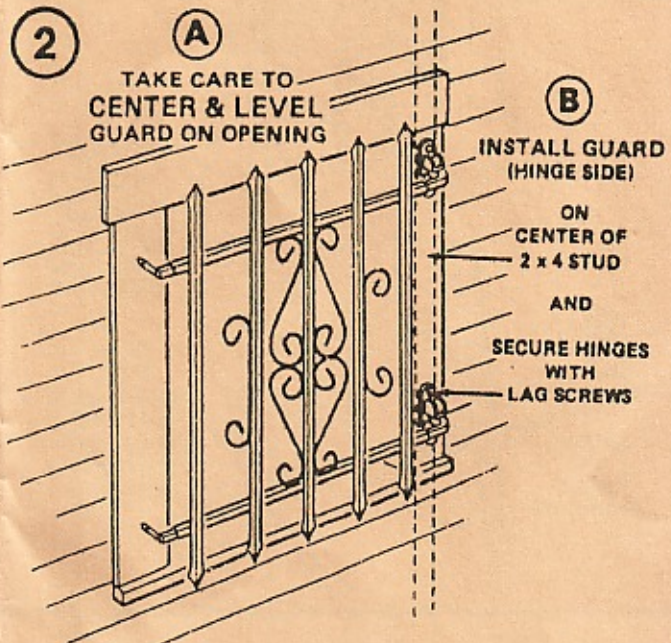
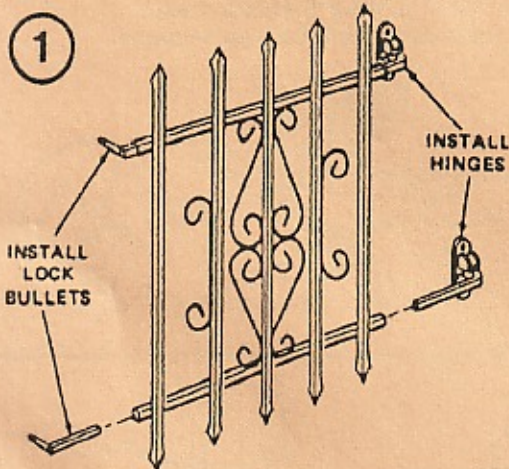


DOUBLE POINT STIRRUP SAFETY RELEASE LATCH


INSTALLATION INSTRUCTIONS

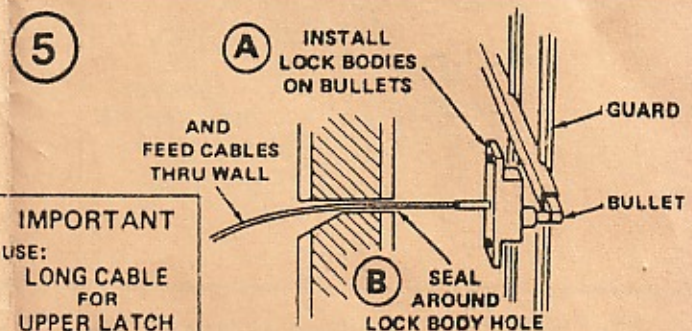


IMPORTANT
TO INSURE PROPER RELEASE OPERATION AN
ACCURATE ALIGNMENT BETWEEN LOCK BODY
AND LOCK BULLET MUST BE MADE

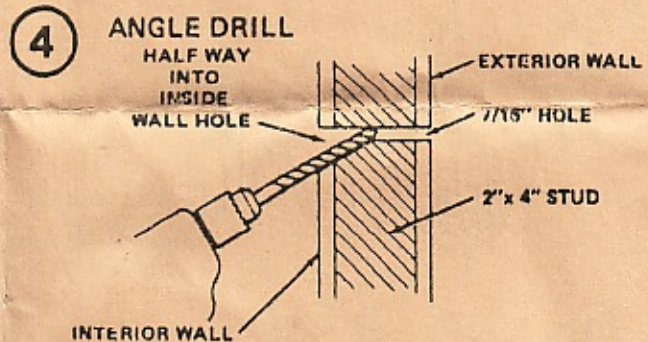

IMPORTANT
USE:
LONG CABLE
FOR
UPPER LATCH
SHORT CABLE
FOR
LOWER LATCH

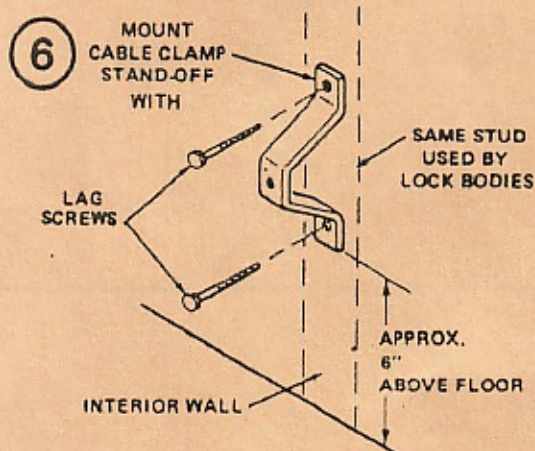

CAUTION
DO NOT
KINK CABLES

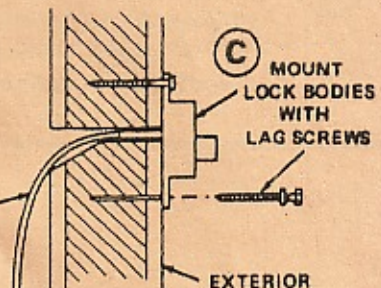

7



ENTRANCE HOLE

A


DO NOT
PULL
CABLES
TIGHT
SLIGHT LOOP
NECESSARY

B

HOLD CABLES
NEXT TO
STAND-OFF
AND MARK
WITH FILE


C

MARK
CABLE SHIELDS
HERE
APPROX.
1/4"
BELOW
STAND-OFF

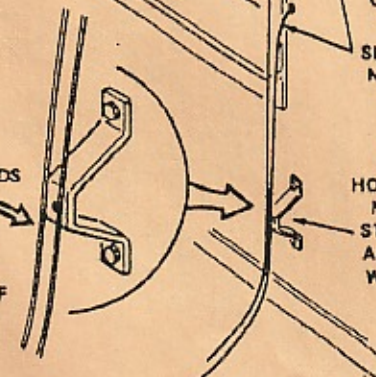

8

CUT CABLE SHIELD ONLY
(BE CAREFUL NOT TO DAMAGE CABLE)

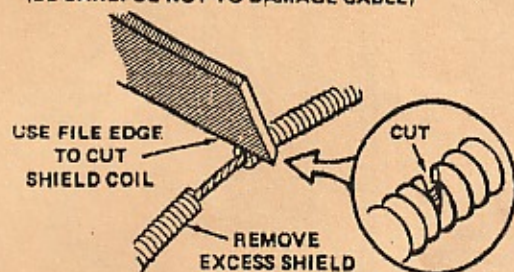


9

FASTEN
WITH
CABLE CLAMP

STAND-OFF

CAUTION
DO NOT PINCH CABLES

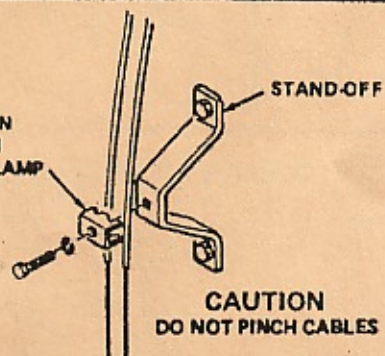

10

A

REMOVE
SLACK
FROM
CABLES

B


KINK CABLES
EQUALLY
APPROX. 2" BEYOND
CABLE SHIELD

D

TRIM
EXCESS CABLES
AFTER ASSEMBLY

C

ASSEMBLE
FOOT RELEASE
HANDLE
AND CLAMP

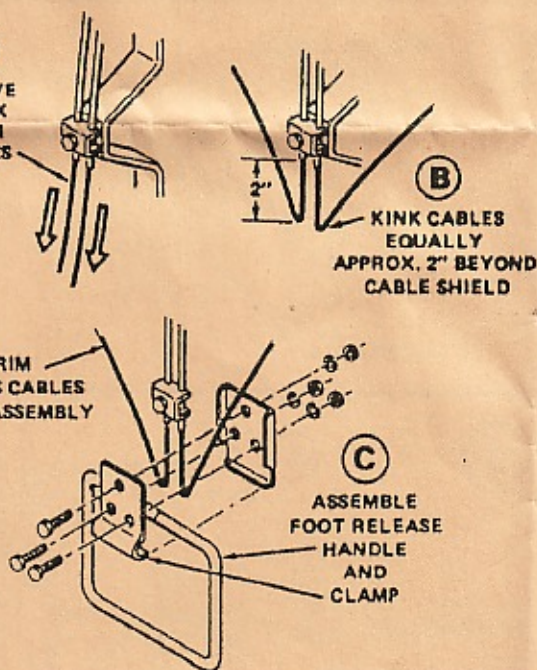

11

TEST THE RELEASE MECHANISM SEVERAL TIMES
TO INSURE PROPER OPERATION.
THE GUARD SHOULD SPRING FREE OF OPENING
UPON ACTUATION, AND CLOSE EASILY.
DO NOT SLAM GUARD TO CLOSE

12

INSTALL
ALUMINUM
COVERS
WITH
SCREWS

RELEASE
CABLES

FOOT
RELEASE

