


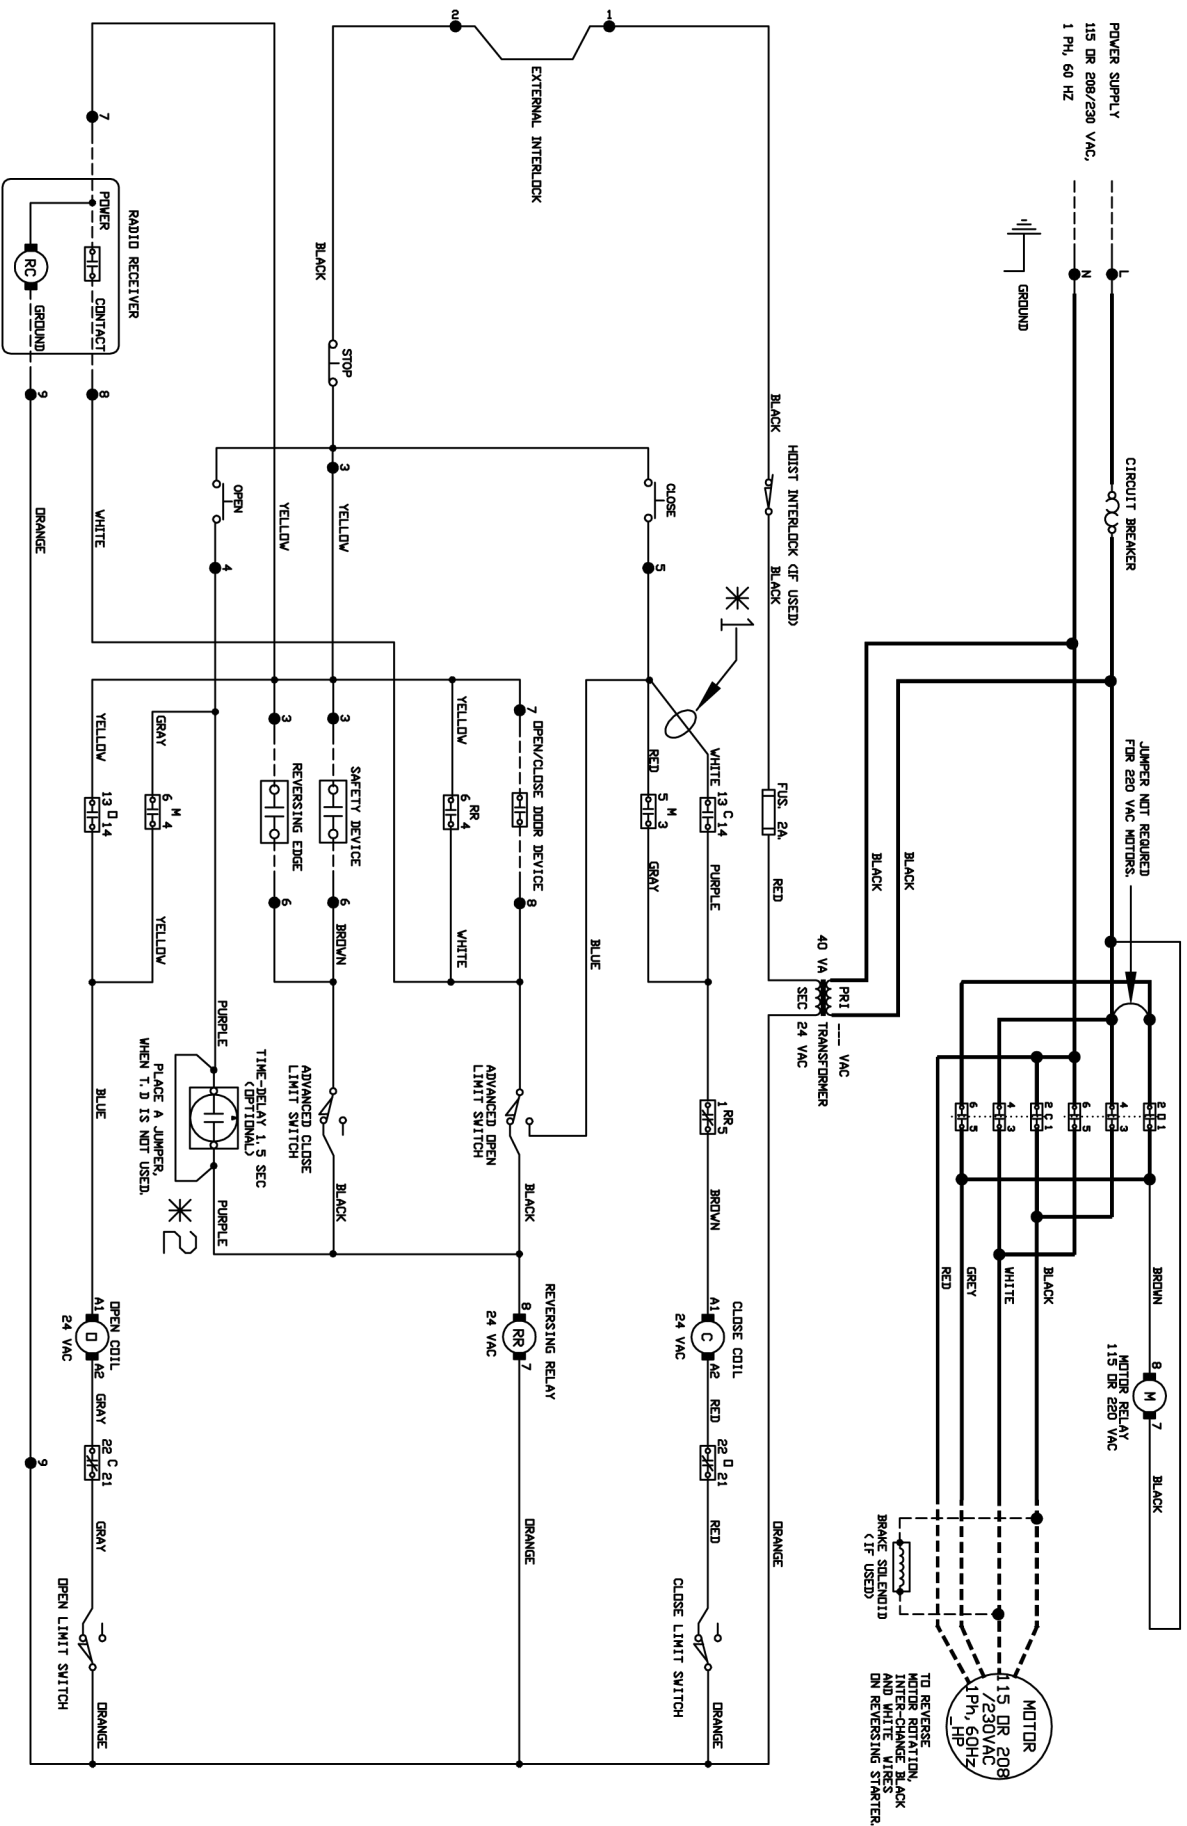

CIRCUIT DESCRIPTION.

1. 24VAC CONTROL CIRCUIT.
2. OPEN/CLOSE/STOP COMMANDS.
3. SAFETY REVERSE.
4. PRE-WIRE FOR RADIO-CONTROLS, LOOP DETECTORS, PHOTOCELLS ETC.

*1-CONTROL WIRING OPTION ON CLOSE.

THIS MOTOR LEAVES THE FACTOR WITH A '22' WIRING-MEANING THAT CONSTANT PRESSURE IS REQUIRED TO CLOSE THE DOOR IF MOMENTARY DEPRESSION ON CLOSE. 22 IS DESIRED THEN REMOVE THE WHITE WIRE FROM TERMINAL #3 AND PLACE IT ON TERMINAL #3.

*2-TIME DELAY UPON REVERSE.

IF 15 SEC. TIME DELAY UPON REVERSE IS REQUIRED, REMOVE THE PURPLE WIRE FROM TERMINAL #4 AND CONNECT TO ONE END OF TIME-DELAY AND CONNECT THE OTHER END, BACK TO TERMINAL #4.

SINGLE PUSH-BUTTON STATION

SAFETY EDGE AND CONTACT

OPEN-CLOSE DEVICE

RADIO RECEIVER

24 VAC POWER



TECH. HELP LINE:
CANADA: 1-(877) 888-1116
USA: 1-(888) 816-8584

TITLE

DWG. NO.

VERIFIED BY

CLIENT

PROJECT

MANUFACTURER

MICANAN SYSTEMS INC.

MS100-S

C.S.

DATE

14.04.09

REV

D