WATCHMAN®
Your Virtual Security Guard

W410
model

Advanced Telephone Entry System

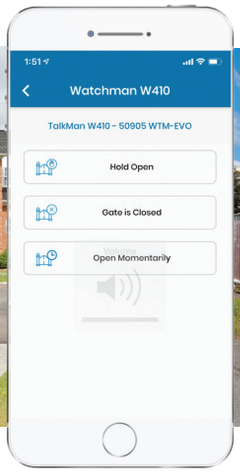

Part Numbers:
AA1TP VZN
AA1TP ATT

W410 EXCLUSIVES

- Works on Verizon or AT&T Cellular Networks
- Calls up to 9 Telephone Numbers in 3 tiers
- Voice Mail Intelligence - VMI
  System ignores call when reaches voice mail and continues call tree
- Single External Camera Integration (optional)
- Prop Open Notification if gate is left open more than 3 minutes
- TrueCloud™ Web Portal for Administration

W410 FEATURES

- Gate can easily be controlled from app
- New low cellular plans (with or without photos)
- 1 native 26-bit Wiegand port
- Up to 1,500 local access codes and 64,000 non-local codes
- Cameras take photos on access attempts and on demand
- All transactions and photos stored on TrueCloud portal

EXCLUSIVE External Camera Options*

- Single external camera
- 4 Camera options to choose from
- Pixel activated video stored on camera
- Cloud-Stored Still Photos

NEW
Watchman WXP*
Wiegand Expansion Panel
4 Door Controller
for Watchman

*See WXP sheet for details

cellgate
powered by:
verizon AT&T

*See external camera sheet for more details

1.855.MY.GATES

cell-gate.com

WATCHMAN®
Your Virtual Security Guard

W410
model

W410 Advantages

- Highly affordable price point
- Choose desired rate plan (with or without photos)
- Convenient call group management
- Control Gates/doors on demand or on a schedule
- Fewer stranded visitors due to voice mail intelligence (VMI)
- All access points on a property can be controlled from a single system (with WXP integration)
- No software required

Dealer Benefits

- NEW: Customer self-activation
- Easy 6-wire installation
- End-to-end support
- Cellular carrier and signal strength verification
- Enables installers to test all features

TrueCloud IoT

TrueCloud Web Portal

Manage all your CellGate Devices on One Dashboard

- Event logs of all transactions
- Photos with access transactions (with photo rate plan)
- Create access credentials w/ date & time restrictions
- Manage push notifications
- Administrative login privileges

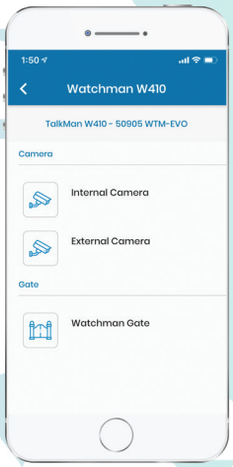

Cellgate App

- Gate/doors can be opened or held open from anywhere
- Take photos on demand from internal and external cameras (with photos rate plan)
- Review historical photo and access credential use info
- Receive prop-open notifications w/ gate status

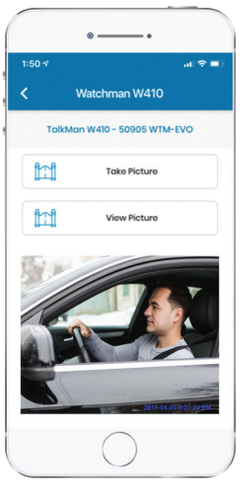

App Available at
App Store and Google Play

SPECIFICATIONS

External Camera Options – limit 1 per W410
Bullet Cameras
4mm Fixed Focal Lens
5-64mm Varifocal Lens
2.8-12mm Varifocal Lens
Dome Camera
3-10.5mm Varifocal Lens

1Built in Camera: 3mm pixels

Internal Camera Angles:
Horizontal: 120°
Vertical: 65°

Power Consumption (12v DC):
275mA (daytime), 330mA (night)

External Camera Power Consumption:
Bullet Cameras:
4mm Fixed Focal Lens:
Max Consumption-Day = 180mA Night = 400mA
5-64mm Varifocal Lens:
Max Consumption-Day = 180mA Night = 400mA
2.8-12mm Varifocal Lens:
Max Consumption- Day = 195mA Night = 480mA
Dome Camera
3-10.5mm Varifocal Lens:
Max Consumption-Day = 195mA Night = 480mA

1 Wiegand Expansion Port (26 bit): 12 volt

2 Relays:
Contact rating: .5A @ 125v AC, 2A@30v DC
Switching voltage: 250v AC, 220v DC
Switching current: 2A

2 Digital inputs

IP65

Operating Temperature
-20°C - 55°C | -4°F - 131°F

Dimensions (excluding antenna)
Height- 8.3" (211mm)
Width- 6.4" (163mm)
Depth- 5.5" top (140mm), 4.7" bottom (120mm)

Cellular Technology/Networks
4G/LTE Verizon and AT&T

Included in box
Watchman W410
Power supply – 5A
Magnetic switch
Installation manual & user manual

Antenna Options
L-bracket
Directional panel

2 YEAR limited WARRANTY